



A BRILLIANT SOLUTION FOR EVERY SPACE – INDOOR

STRIP NAKED LED RETROFIT KITS

RETROFIT STANDAR (18 - 52 watts), (3200 - 9000 lumens)

7 YEAR WARRANTY

MODEL #

RFTSTD/LD/L4-8FT/W4-8IN/2-4C1D/EVL



127 - 277 VOLTS

3000°k - 4000°k - 5000°k

WATTS	27	42
LUMENS	4,800	7,000
LENGTH	4-8 ft	4-8 ft
WIDTH	2-6 in	2-6 in

- * Housing made of 24-gauge sheet with electrostatic paint application
- * Programmable equipment (power and lumens)
- * Easy maintenance and installation

Disconnection and removal of fluorescent equipment

With installation and assembly of retro kit in existing luminaires

Reflector replacement

Long life high output LEDs, dimming optional

Tunable light color and sensors available

Occupancy and daylight sensors wireless Bluetooth or wired at your request





STRIP NAKED LED RETROFIT KITS

RETROFIT STANDAR (18 - 52 watts), (3200 - 9000 lumens)


MODEL #

RFTSTD/LD/L4-8FT/W4-8IN/2-4C1D/EVL

LEDs: <https://www.universaldouglas.com/wp-content/uploads/2022/06/M10CC8xxD56N2V-1.pdf>

Driver: <https://www.universaldouglas.com/wp-content/uploads/2022/06/D15CC55UNVPW-C-2.pdf>

Model	Power (watts)	Flux (lumens)	Efficacy (lm / w)	Number modules led	Dimensions		
					Length	Width	Height
RFTSTD/LD/L4FT/W4-8IN/2C1D/EVL	18	3200	178	2	4'	4-8"	2-6"
RFTSTD/LD/L4FT/W4-8IN/2C1D/EVL	24	4200	175	2	4'	4-8"	2-6"
RFTSTD/LD/L8FT/W4-8IN/3C1D/EVL	27	4800	178	3	8'	4-8"	2-6"
RFTSTD/LD/L8FT/W4-8IN/3C1D/EVL	38	6600	174	3	8'	4-8"	2-6"
RFTSTD/LD/L8FT/W4-8IN/4C1D/EVL	45	8000	178	4	8'	4-8"	2-6"
RFTSTD/LD/L8FT/W4-8IN/4C1D/EVL	52	9000	173	4	8'	4-8"	2-6"

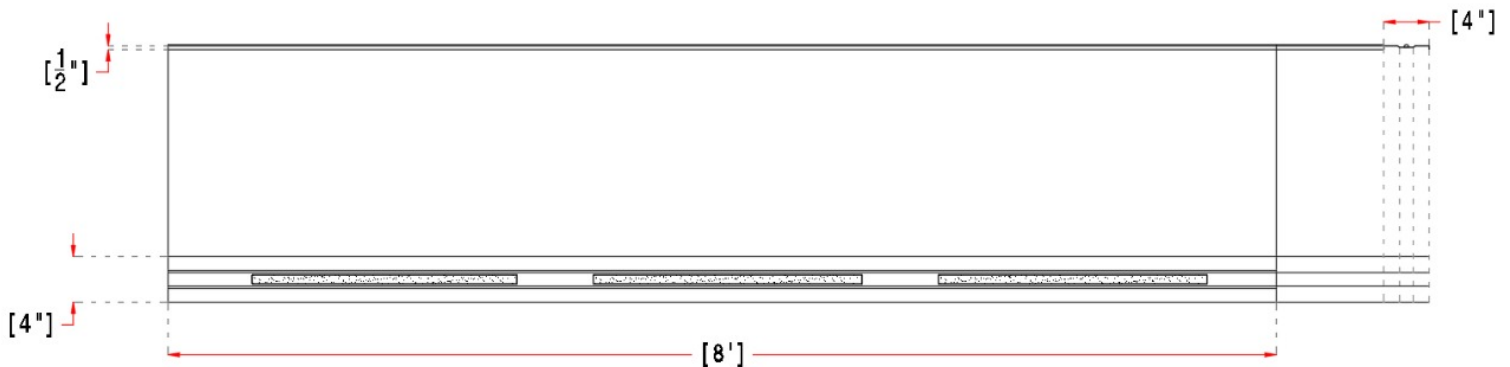

Mounting: Recycling of existing luminaires

Lifetime:80,000 hours

LED card connected in-line

Disassembly, fluorescent equipment, lamps, and ballasts

Connection of LED card to driver programmed according to desired power

