



A BRILLIANT SOLUTION FOR EVERY SPACE – INDOOR

HIGHBAY RAVEN

(1X2 feet), (40 - 150 watts), (7800 - 24600 lumens)

10 YEAR WARRANTY

MODEL #

HBRVN/LD/L2FT/W1FT/2C1D/EVL



127 - 277 VOLTS

3000°k - 4000°k - 5000°k

WATTS	60	130
LUMENS	11,300	19,700
LENGTH	2 ft	2 ft
WIDTH	1 ft	1 ft

- * Flat Opal acrylic diffuser (optional)
- * Programmable equipment (power and lumens)
- * Easy maintenance and installation

Durable design made of cold rolled steel

Multi-stage cleaning cycle



Dupont white powder enamel coating

Electro-welded assembly before coating process

Long life high output LEDs, dimming optional

Tunable light color and sensors available

Occupancy and daylight sensors wireless Bluetooth or wired at your request

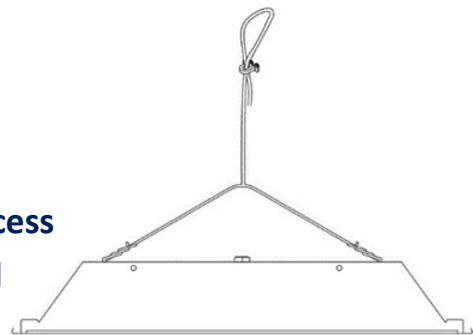



HIGHBAY RAVEN

(1X2 feet), (40 - 150 watts), (7800 - 24600 lumens)



MODEL #

LHBRVN/LD/L2FT/W1FT/2C1D/EVL

LEDs: <https://www.universaldouglas.com/wp-content/uploads/2022/06/M18CC8xxD156N2W-1.pdf>

Driver: <https://www.universaldouglas.com/wp-content/uploads/2022/06/D20CC180UNVPWX12-F-2.pdf>

Model	Power (watts)	Flux (lumens)	Efficacy (lm / w)	Number modules led	Dimensions		
					Length	Width	Height
HBRVN/LD/L2FT/W1FT/2C1D/EVL	40	7800	195	2	2'	1'	3"
HBRVN/LD/L2FT/W1FT/2C1D/EVL	50	9600	192	2	2'	1'	3"
HBRVN/LD/L2FT/W1FT/2C1D/EVL	80	14800	185	2	2'	1'	3"
HBRVN/LD/L2FT/W1FT/2C1D/EVL	110	19500	177	2	2'	1'	3"
HBRVN/LD/L2FT/W1FT/2C1D/EVL	150	24600	164	2	2'	1'	3"

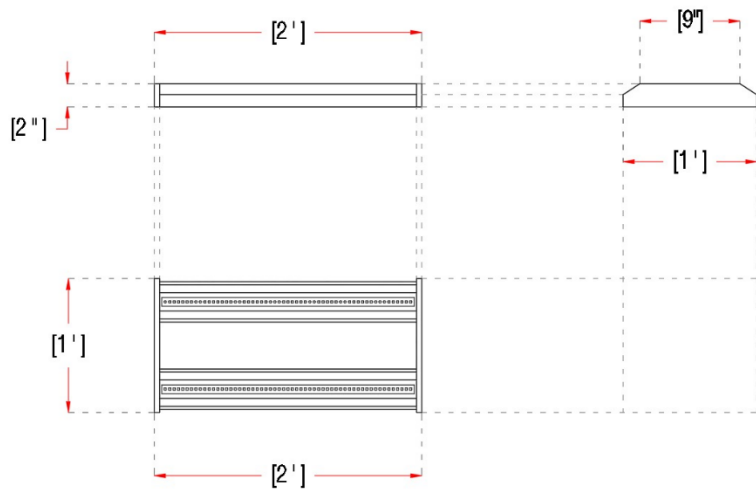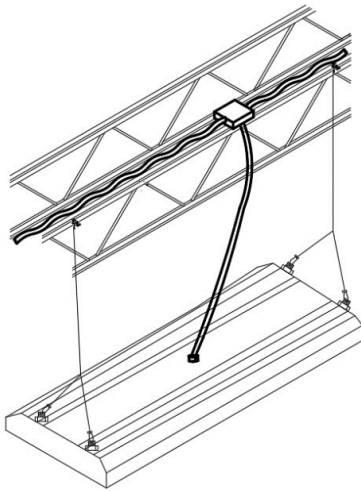

Mounting: hang

Compact and lightweight design equipment

Equipment with high light output

Gripple mounting system (optional)

Lifetime:80,000 hours

Variable Height Mount

Wide distribution patterns

