



A BRILLIANT SOLUTION FOR EVERY SPACE – INDOOR


STRIP / ROW

DIRECT (4 - 8 feet), (18 - 52 watts), (3200 - 9000 lumens)

10 YEAR WARRANTY

MODEL #

LCRDRT/LD/L4-8FT/W4-8IN/2-4C1D/EVL

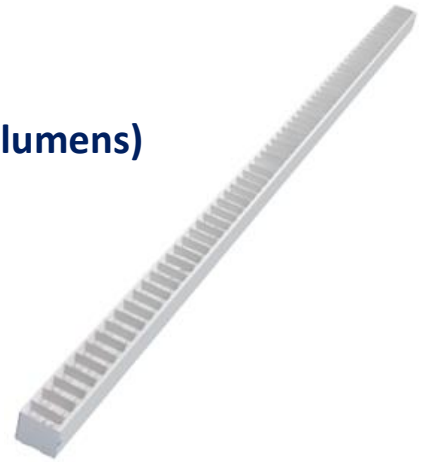

127 - 277 VOLTS

3000°k - 4000°k - 5000°k

WATTS	27	42
LUMENS	4,800	7,000
LENGTH	4 ft	8 ft
WIDTH	4 in	4 in

- * White polycarbonate diffuser lens (optional)
- * Programmable equipment (power and lumens)
- * Easy maintenance and installation

Durable design made of cold rolled steel

Multi-stage cleaning cycle


Dupont white powder enamel coating

Electro-welded assembly before coating process

Long life high output LEDs, dimming optional

Tunable light color and sensors available

Occupancy and daylight sensors wireless Bluetooth or wired at your request

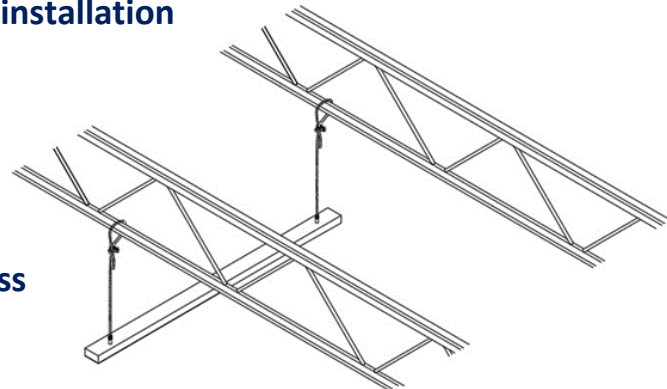



STRIP / ROW

DIRECT (4 - 8 feet), (18 - 52 watts), (3200 - 9000 lumens)


MODEL #

LCRDRT/LD/L4-8FT/W4-8IN/2-4C1D/EVL

LEDs: <https://www.universaldouglas.com/wp-content/uploads/2022/06/M10CC8xxD56N2V-1.pdf>

Driver: <https://www.universaldouglas.com/wp-content/uploads/2022/06/D15CC55UNVPW-C-2.pdf>

Model	Power (watts)	Flux (lumens)	Efficacy (lm / w)	Number modules led	Dimensions		
					Length	Width	Height
LCRDRT/LD/L4FT/W4IN/2C1D/EVL	18	3200	178	2	4'	4"- 8"	3"
LCRDRT/LD/L4FT/W4IN/2C1D/EVL	24	4200	175	2	4'	4"- 8"	3"
LCRDRT/LD/L4FT/W4IN/2C1D/EVL	30	5200	173	2	4'	4"- 8"	3"
LCRDRT/LD/L8FT/W8IN/3C1D/EVL	37	6400	175	3	8'	4"- 8"	3"
LCRDRT/LD/L8FT/W8IN/3C1D/EVL	46	8000	174	3	8'	4"- 8"	3"
LCRDRT/LD/L8FT/W8IN/3C1D/EVL	53	9000	171	3	8'	4"- 8"	3"

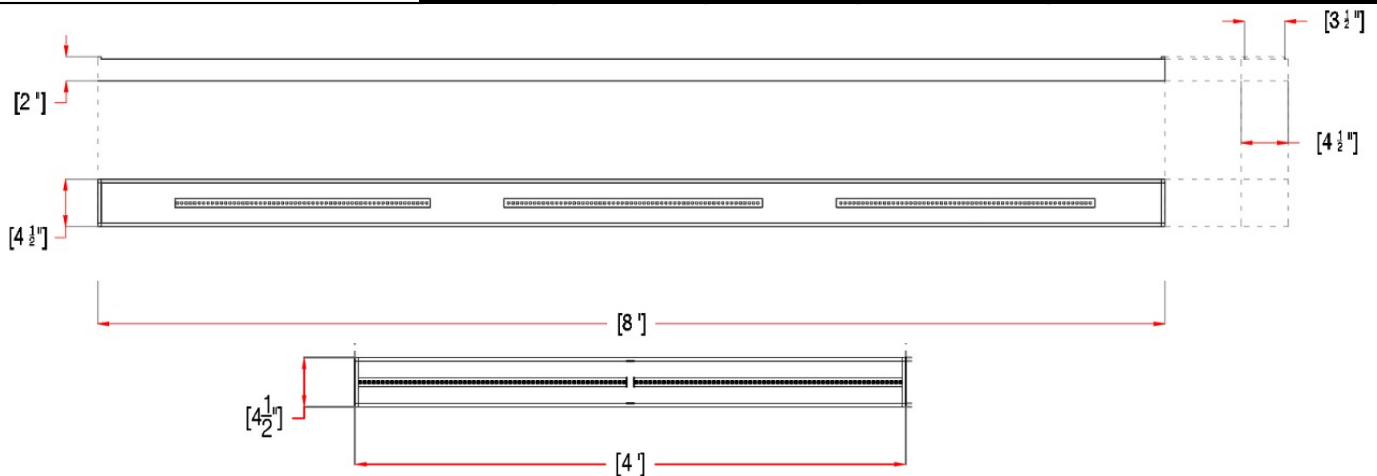

Mounting: hang – surface

Compact and lightweight design equipment

Gripple mounting system (optional)

Aluminum reflector parabolic louver specular (optional)

Splice connection patent U.S 6,659,628 B2 (optional)

Lifetime: 80,000 hours

5-position pre-wiring

