



A BRILLIANT SOLUTION FOR EVERY SPACE – INDOOR


LAY-IN AND SURFACE MOUNTED TROFFERS

LOUVER EUROPA (1X4, 2X2, 2X4 feet), (18 - 48 watts), (3200 - 8000 lumens)

7 YEAR WARRANTY

MODEL #

LSMTLVR/LD/L2-4FT/W1-2FT/2C1D/EVL

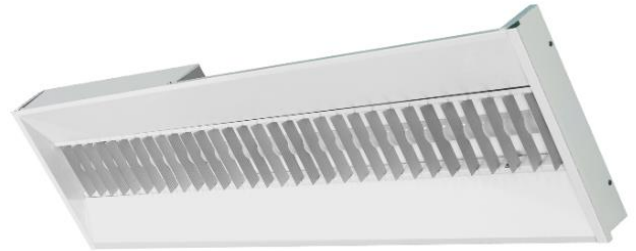

127 - 277 VOLTS

3000°k - 4000°k - 5000°k

WATTS	24	48
LUMENS	4,200	8,000
LENGTH	1 ft	4 ft
WIDTH	4 ft	2 ft



- * Aluminum reflector parabolic louver specular
- * White polycarbonate diffuser lens
- * Programmable equipment (power and lumens)

Durable design made of cold rolled steel

Multi-stage cleaning cycle


Dupont white powder enamel coating

Electro-welded assembly before coating process

Long life high output LEDs, dimming optional

Tunable light color and sensors available

Occupancy and daylight sensors wireless Bluetooth or wired at your request

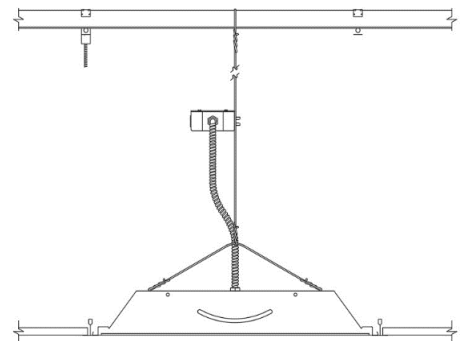



LAY-IN AND SURFACE MOUNTED TROFFERS

LOUVER EUROPA (1X4, 2X2, 2X4 feet), (18 - 48 watts), (3200 - 8000 lumens)



MODEL #

LSMTLVR/LD/L2-4FT/W1-2FT/2C1D/EVL

LEDs: <https://www.universaldouglas.com/wp-content/uploads/2022/06/M10CC8xD56N2V-1.pdf>

Driver: <https://www.universaldouglas.com/wp-content/uploads/2022/06/D15CC55UNVPW-C-2.pdf>

Model	Power (watts)	Flux (lumens)	Efficacy (lm / w)	Number modules led	Dimensions		
					Length	Width	Height
LSMTLVR/LD/L4FT/W1FT/2C1D/EVL	18	3200	178	2	4'	1'	3"
LSMTLVR/LD/L4FT/W1FT/2C1D/EVL	24	4200	175	2	4'	1'	3"
LSMTLVR/LD/L2FT/W2FT/2C1D/EVL	30	5200	173	2	2'	2'	3"
LSMTLVR/LD/L2FT/W2FT/2C1D/EVL	36	6200	172	2	2'	2'	3"
LSMTLVR/LD/L4FT/W2FT/2C1D/EVL	42	7200	171	2	4'	2'	3"
LSMTLVR/LD/L4FT/W2FT/2C1D/EVL	48	8000	167	2	4'	2'	3"

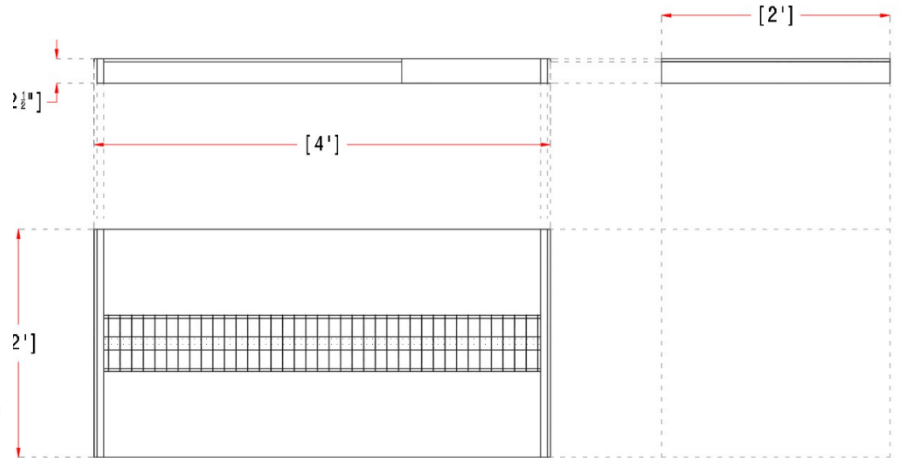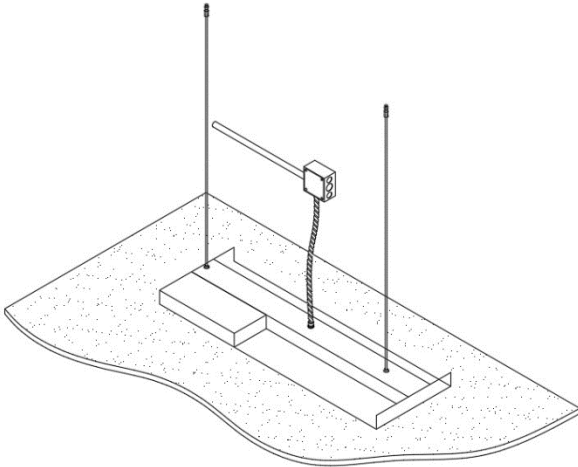

Mounting: lay-in mounted - surface

Drop ceiling or smooth ceiling installation

With bezel accessory for smooth ceiling

Compact and lightweight design equipment

Lifetime: 80,000 hours

Hinged lid system (optional)

